

UN EQUIPO PARA CADA NECESIDAD

ONE EQUIPMENT FOR EVERY NEED

TECNOLOGÍA ORC


ORC TECHNOLOGY

Rank MT3 performance

		<i>nominal</i>									
Heat source	Inlet temperature (°C) ⁽¹⁾	120.0	120.0	130.0	130.0	130.0	140.0	140.0	140.0	150.0	150.0
	Fluid	Water	Water	Water	Water	Water	Water	Water	Water	Water	Water
	Flow rate (m³/h)	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5	77.5
	Thermal power (kWt)	680-750	640-710	865-955	830-920	785-865	820-905	785-870	740-820	740-820	695-770
Heat sink	Inlet temperature (°C) ⁽²⁾	20.0	30.0	20.0	30.0	40.0	20.0	30.0	40.0	30.0	40.0
	Fluid	Water	Water	Water	Water	Water	Water	Water	Water	Water	Water
	Flow rate (m³/h)	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0	63.0
	Thermal power (kWt)	470-520	455-505	580-645	575-635	555-615	540-600	530-590	510-570	490-545	470-525
Electrical power	Gross power (kWe)	69.0-77.0	61.5-68.0	90.0-100.0	83.5-93.0	73.5-82.0	90.0-100.0	83.5-92.5	73.5-81.5	82.0-91.5	72.0-80.5
	Net power (kWe)	64.0-71.0	56.5-63.0	82.5-91.5	76.0-84.5	66.5-73.5	82.5-92.0	76.0-84.5	66.5-74.0	75.5-84.0	65.5-73.0

(1) The output temperature in the heat source for the nominal operating conditions is 130°C (a temperature difference of 10°C). For all other operating conditions, the outlet temperature should be obtained using the provided thermal power.

(2) The output temperature in the heat sink for the nominal operating conditions is 40°C (a temperature difference of 10°C). For all other operating conditions, the flow rate should be adjusted in order to obtain the same temperature difference (10°C).

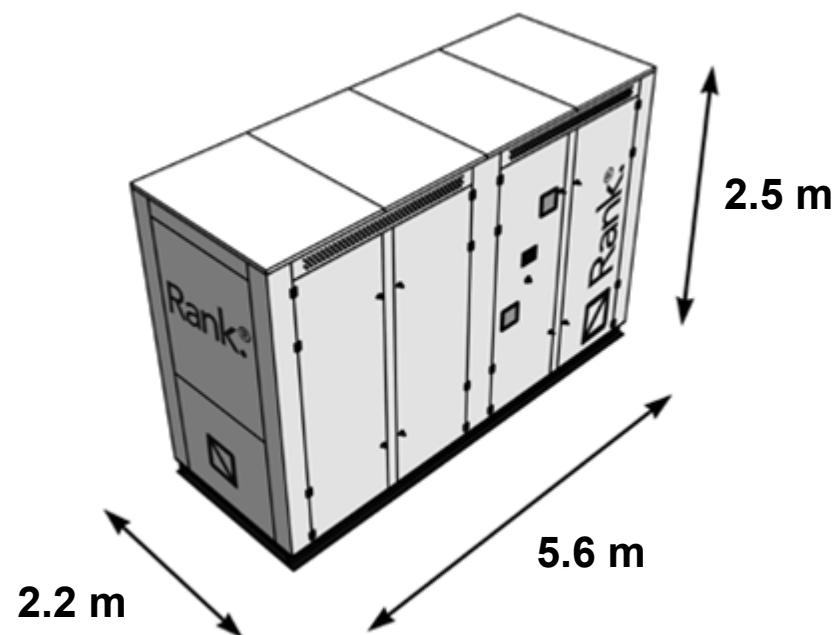

Reference standards:

- CE Low voltage Directive 2006/95/EC
- Machinery Directive 2006/42/EC
- Electromagnetic Compatibility Directive 2004/108/EC
- Pressurized Equipment Directive 2014/68/EC
- ENA ER G59/3
- ASME B31.1 – Power Piping Code, Mechanical
- ASME B31.3 – Process Piping Code
- Receiver complies with ASME Boiler and Pressure Vessel Code Section VIII
- Built in accordance with UL 508A- Control Panel Wiring
- Sound pressure tested in accordance with EN/ISO 3744:2010

Connections:

Heat source: 2 ISO flanges DN150 PN16
Heat sink: 2 ISO flanges DN150 PN16
Electrical: 400V 50Hz 3ph
Data: Ethernet RJ45